

PRODUCTION OF SHEAR BLADES

UKB[®]

ADVANTAGES

For your shear/guillotine we produce shear blades according to your specifications. The material of the shear blades is selected especially for use and the material that have to be cut.

- Up to 4.200 mm in one piece
- 4-, 2- or 1 cutting edge
- With threaded hole or double sided countersink
- Use of alloyed and high-alloyed materials

Your contact details

Company	
Street	
ZIP-code/Town	
Phone/fax	
E-Mail	
Contact person	

Standard tolerances

Hardness	Height	Width	Parallelism
± 1HRc	± 0,5 mm	± 0,2 mm	± 0,03 mm

UKB INFO

Send us your information by
E-mail at post@ukb-gmbh.de or
by fax to +49 (0) 27 36/44 42-22

Kind of material/frequency

Aluminium	about	%
Steel	about	%
Stainless steel	about	%
Other materials	about	%

Material thickness/frequency


Min. mat. thickness	mm	about	%
Average mat. thickness	mm	about	%
Max. mat. thickness	mm	about	%

Application frequency per day

By the hour	yes	no
One-shift operation	yes	no
Multi-shift operation	yes	no


Quantity

Upper-blade	Pieces
Lower-blade	Pieces

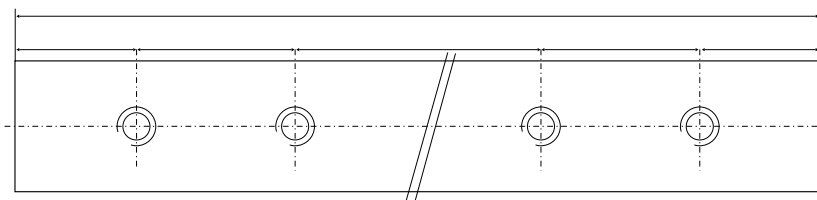


Examples:


4 Cutting edges with threaded hole

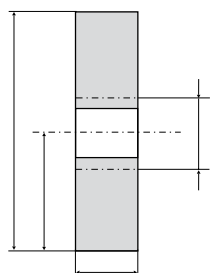

2 Cutting edges with threaded hole

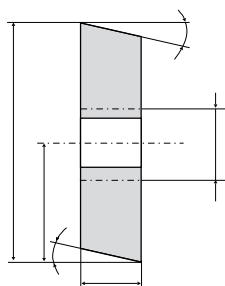

1 Cutting edge with threaded hole

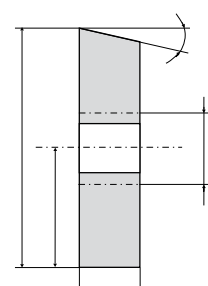

Double sided countersink

